

# GTO<sup>®</sup>/ACCESS SYSTEMS

**PROFESSIONAL RESIDENTIAL**

Technology • Innovation • Quality  
Since 1987



## DRIVEWAY VEHICLE SENSOR (FM139)

Automatically activates gate operator  
“Hands-Free” when a vehicle exits the  
property. Easy to install.


### Driveway Wand Sensor direct burial wire lengths:

(FM139) 50 ft. (15.3 m)

(FM140) 100 ft. (30.5 m)

(FM141) 150 ft. (45.7 m)

(FM141-250) 250 ft. (76.2 m)

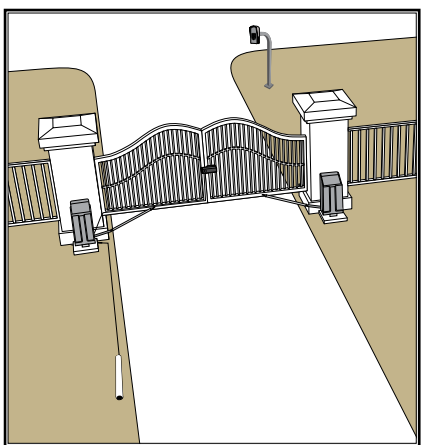

AVAILABLE FROM:

## STANDARD FEATURES

- Electromagnetic sensor detects vehicles-in-motion.
- Compatible with all automatic gate operators, or other systems requiring a dry contact input device.
- Wide input voltage range (8-26 V AC or 11-30 V DC).
- Ideal for solar application, 1.5 mA current consumption.
- Relay latch time of 2 seconds. May not be used as a safety device.
- Designed to minimize line noise of 50Hz or 60Hz; improves detection capability near power lines and avoids crosstalk frequency issues.
- Dimensions: 1.75" (4.5 cm) diameter x 16.75" (42.5 cm) long.

1-800-543-GATE (4283) • WWW.GTOACCESS.COM

GTO®, GTO/PRO®, Bulldog®, GTO Access Systems™, are trademarks of Gates That Open, LLC and are the exclusive property of Gates That Open, LLC ("GTO"). All rights are reserved by GTO, and these marks may not be used in any form without the prior written permission of GTO. © 2009